

Project Summary

Status: Approved and Funded


MUD 6



Water Renewal
THE WOODLANDS

Lift Station No. 1 Gravity Main Bypass and Decommissioning

Estimated Project Cost (2025 dollars): \$1,475,711

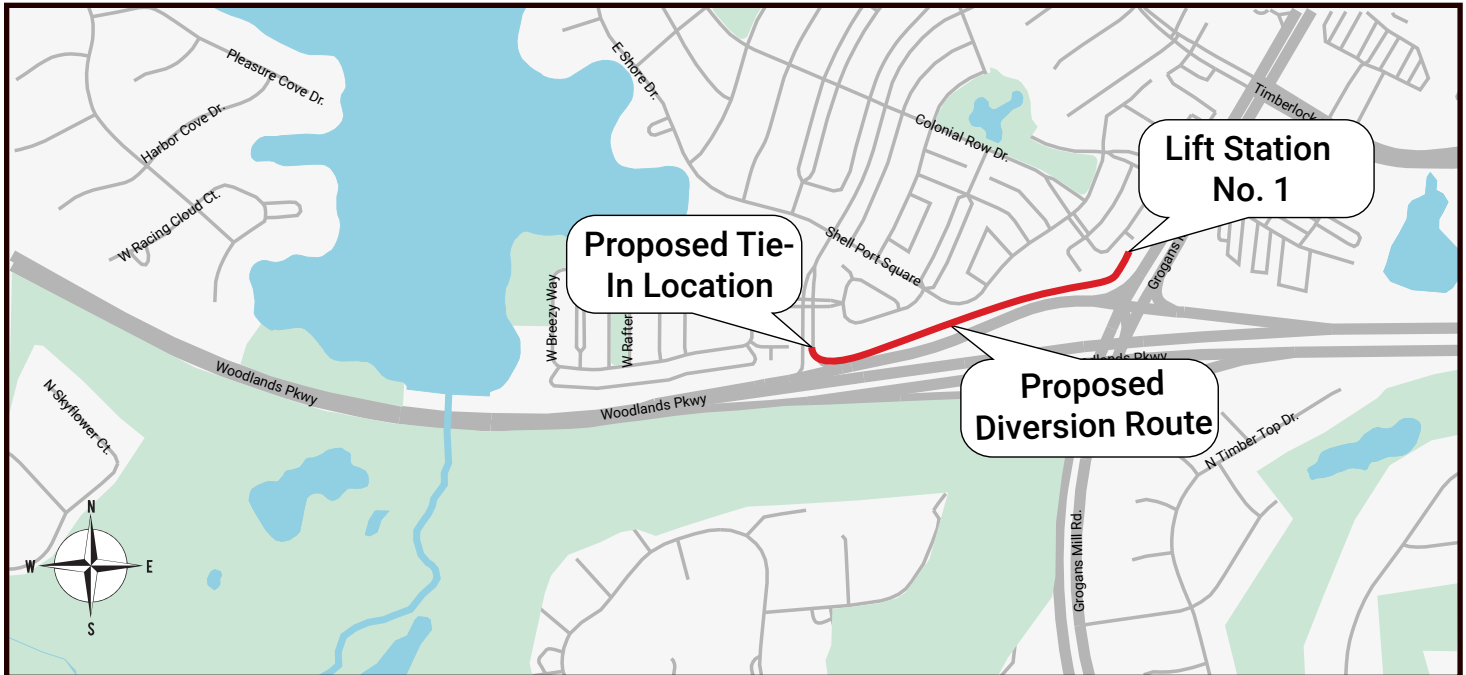

Project History

Lift Station No. 1, built in 1974 to manage wastewater along Grogan's Mill Road, has aged significantly, with its force main now in poor condition and requiring replacement. A 2023 feasibility study found that a 42-inch gravity line, installed in the mid-1990s just over a quarter mile west of the lift station, is suitably sized and deep enough to intercept flows currently managed by the lift station. This presents an opportunity to construct a gravity main, redirect wastewater, and decommission the aging lift station and force main, reducing long-term operational and maintenance costs.

Description

This project will construct a gravity sewer along Woodlands Parkway, redirecting flows from Lift Station No. 1 to an existing 42-inch gravity line. This will allow decommissioning the aging lift station and force main, reducing maintenance costs and improving wastewater efficiency.

Project Type

Design and Construction

Current Phase:



Funding Source:

Renewal and Replacement funds

Timeline:

Design Completion:

October 2025

Construction Start:

March 2026

Actions:



Wastewater
Treatment



Wastewater
Management



www.waterrenewalthewoodlands.com

Last updated August 2025.

All information provided for illustrative purposes and is subject to change.